


241 Reducing bush, ISO/EN N4

- Forms I, II, III are available only as marked under column "Form", Form I can also be supplied with continuous internal thread (=241D).
- ST ... these types of fittings are made from steel (galvanised finish = electroplated) and not suitable for drinking water installations.

EN	B/G	Dim. (1-2) [inch]	Form	Code	a [mm]	b [mm]	z [mm]	s [mm]
ST •	B	1/4 - 1/8	I	770 241 115	20		13	17
ST •	G	1/4 - 1/8	I	770 241 215	20		13	17
ST •	B	3/8 - 1/8	I	770 241 116	20		13	19
ST •	G	3/8 - 1/8	I	770 241 216	20		13	19
ST •	B	3/8 - 1/4	I	770 241 117	20		10	19
ST •	G	3/8 - 1/4	I	770 241 217	20		10	19
•	B	1/2 - 1/8	II	770 241 118	24		17	23
•	G	1/2 - 1/8	II	770 241 218	24		17	23
•	B	1/2 - 1/4	II	770 241 119	24		14	23
•	G	1/2 - 1/4	II	770 241 219	24		14	23
•	B	1/2 - 3/8	I	770 241 120	24		14	23
•	G	1/2 - 3/8	I	770 241 220	24		14	23
•	B	3/4 - 1/4	II	770 241 121	26		16	30
•	G	3/4 - 1/4	II	770 241 221	26		16	30
•	B	3/4 - 3/8	II	770 241 122	27		16	30
•	G	3/4 - 3/8	II	770 241 222	27		16	30
•	B	3/4 - 1/2	I	770 241 123	26		13	30
•	G	3/4 - 1/2	I	770 241 223	26		13	30
•	B	1 - 1/4	II	770 241 124	29		19	36
•	G	1 - 1/4	II	770 241 224	29		19	36
•	B	1 - 3/8	II	770 241 125	29		19	36
•	G	1 - 3/8	II	770 241 225	29		19	36
•	B	1 - 1/2	II	770 241 126	29		16	36
•	G	1 - 1/2	II	770 241 226	29		16	36
•	B	1 - 3/4	I	770 241 127	29		14	36
•	G	1 - 3/4	I	770 241 227	29		14	36
•	B	1 1/4 - 3/8	II	770 241 128	31		21	46
•	G	1 1/4 - 3/8	II	770 241 228	31		21	46
•	B	1 1/4 - 1/2	II	770 241 129	31		18	46
•	G	1 1/4 - 1/2	II	770 241 229	31		18	46
•	B	1 1/4 - 3/4	II	770 241 130	31		16	46
•	G	1 1/4 - 3/4	II	770 241 230	31		16	46
•	B	1 1/4 - 1	II	770 241 131	31		14	46
•	G	1 1/4 - 1	II	770 241 231	31		14	46
•	B	1 1/2 - 3/8	II	770 241 132	31		21	50
•	G	1 1/2 - 3/8	II	770 241 232	31		21	50
•	B	1 1/2 - 1/2	II	770 241 133	31		18	50
•	G	1 1/2 - 1/2	II	770 241 233	31		18	50
•	B	1 1/2 - 3/4	II	770 241 134	31		16	50
•	G	1 1/2 - 3/4	II	770 241 234	31		16	50
•	B	1 1/2 - 1	II	770 241 135	31		14	50
•	G	1 1/2 - 1	II	770 241 235	31		14	50
•	B	1 1/2 - 1 1/4	I	770 241 136	33		12	50
•	G	1 1/2 - 1 1/4	I	770 241 236	33		12	50
•	B	2 - 1/2	III	770 241 137	35	48	35	65
•	G	2 - 1/2	III	770 241 237	35	48	35	65
•	B	2 - 3/4	III	770 241 138	35	48	33	65
•	G	2 - 3/4	III	770 241 238	35	48	33	65
•	B	2 - 1	II	770 241 139	37		20	65
•	G	2 - 1	II	770 241 239	37		20	65
•	B	2 - 1 1/4	II	770 241 140	37		18	65
•	G	2 - 1 1/4	II	770 241 240	37		18	65
•	B	2 - 1 1/2	II	770 241 141	37		18	65
•	G	2 - 1 1/2	II	770 241 241	37		18	65
•	B	2 1/2 - 1	III	770 241 142	44	54	37	80
•	G	2 1/2 - 1	III	770 241 242	44	54	37	80
•	B	2 1/2 - 1 1/4	III	770 241 143	40	54	37	80
•	G	2 1/2 - 1 1/4	III	770 241 243	40	54	37	80
•	B	2 1/2 - 1 1/2	II	770 241 144	40		21	80

table continued next page

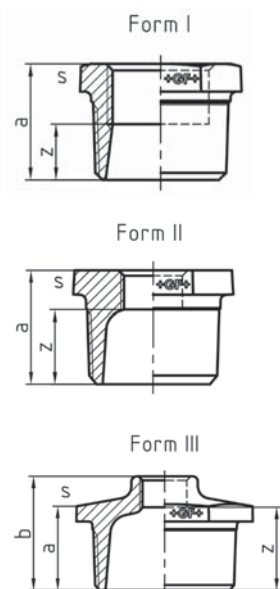

EN	B/G	Dim. (1-2) [inch]	Form	Code	a [mm]	b [mm]	z [mm]	s [mm]	
•	G	2 ½ - 1 ½	II	770 241 244	40		21	80	
•	B	2 ½ - 2	II	770 241 145	40		16	80	
•	G	2 ½ - 2	II	770 241 245	40		16	80	
•	B	3 - 1	III	770 241 146	44	59	42	95	
•	G	3 - 1	III	770 241 246	44	59	42	95	
•	B	3 - 1 ¼	III	770 241 147	44	59	40	95	
•	G	3 - 1 ¼	III	770 241 247	44	59	40	95	
•	B	3 - 1 ½	III	770 241 148	44	59	40	95	
•	G	3 - 1 ½	III	770 241 248	44	59	40	95	
•	B	3 - 2	II	770 241 149	44		20	95	
•	G	3 - 2	II	770 241 249	44		20	95	
•	B	3 - 2 ½	II	770 241 150	44		17	96	
•	G	3 - 2 ½	II	770 241 250	44		17	96	
•	B	4 - 2	III	770 241 151	51	69	45	120	
•	G	4 - 2	III	770 241 251	51	69	45	120	
•	B	4 - 2 ½	III	770 241 152	51	69	42	120	
•	G	4 - 2 ½	III	770 241 252	51	69	42	120	
•	B	4 - 3	II	770 241 153	53		23	120	
•	G	4 - 3	II	770 241 253	53		23	120	