


BIS Dobbeltholder

dobbelt befæstelse af 2 rørbojler til væg eller loft

(K 15 25)


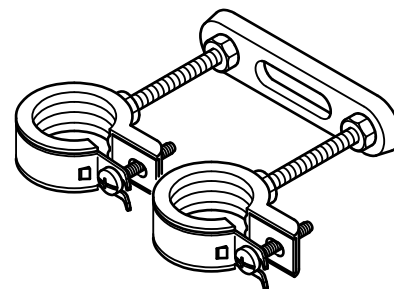


Funktioner og fordele

- med fast centerafstand
- elforzinket
- materiale: stål

Art.nr.	G	L	k (mm)	Fa,z (N)	Pakke1	Pakke2
674 8 040	M8	60 mm	40	1.590	50	500
674 8 055	M8	75 mm	55	1.250	50	500
674 8 065	M8	85 mm	65	1.010	50	500
674 8 085	M8	105 mm	85	730	50	500
674 8 105	M8	125 mm	105	420	50	500
674 8 150	M8	170 mm	150	270	50	500

Max. tilladte belastning: begge fastgørelsespunkter er ligeligt belastede.

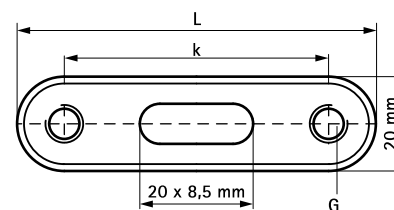

Supplement
BIS Gevindstuds

Alternativ
BIS Duplo fikseringsplader