

THREADED, BLANK FLANGE



Design features

- Made of ductile iron, epoxy powder coated
- Flange sized according to EN 1092-2 and drilled in accordance with EN 1092-2 | PN 10 standard; PN 16 for DN 200 to DN 300 please specify on order - other standards on request



| DN | MOP (PN) | Thread No. 8100 | | | | | | Thread No. 8100L | | | | | | | |
|-----|----------|-----------------|-----|-----|----|-----|----|------------------|----|-----|-----|----|-----|----|----|
| | | 1" | 1¼" | 1½" | 2" | 2½" | 3" | 4" | 1" | 1¼" | 1½" | 2" | 2½" | 3" | 4" |
| 40 | 10 | | | | | | | | | | | | | | |
| 50 | | | | | | | | | | | | | | | |
| 60 | | | | | | | | | | | | | | | |
| 65 | | | | | | | | | | | | | | | |
| 80 | | | | | | | | | | | | | | | |
| 100 | | | | | | | | | | | | | | | |
| 125 | | | | | | | | | | | | | | | |
| 150 | | | | | | | | | | | | | | | |
| 200 | | | | | | | | | | | | | | | |
| 250 | | | | | | | | | | | | | | | |
| 300 | | | | | | | | | | | | | | | |

Threaded flange

No. 8100

No. 8100L

with internal thread ISO 228

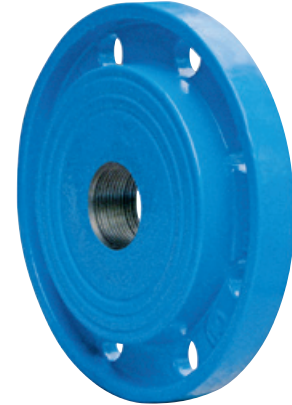

| DN | MOP (PN) | C | Weight No. 8100 | | | | | | | |
|-----|----------|------|-----------------|-------|-------|-------|-------|-------|----|--|
| | | | 1" | 1¼" | 1½" | 2" | 2½" | 3" | 4" | |
| 40 | 10 | 19 | | | 1,80 | 1,70 | | | | |
| 50 | | | 2,30 | 2,20 | 2,20 | 2,10 | | | | |
| 60 | | | | | 3,00 | | | | | |
| 65 | | | 3,20 | 3,10 | 3,00 | 3,00 | 2,70 | | | |
| 80 | | | 3,60 | 3,50 | 3,40 | 3,40 | 3,40 | 2,90 | | |
| 100 | | 4,30 | 4,20 | 4,20 | 4,20 | 3,90 | 3,70 | 3,30 | | |
| 125 | | 5,40 | 5,50 | 5,50 | 5,30 | 5,20 | 5,10 | 4,70 | | |
| 150 | | 7,00 | 6,90 | 6,90 | 6,80 | 6,70 | 6,60 | 6,20 | | |
| 200 | | 20 | 11,50 | 11,30 | 11,30 | 11,00 | 10,60 | 10,30 | | |
| 250 | | 22 | | | 16,20 | 16,00 | 15,00 | | | |
| 300 | 25 | | | | 23,10 | | | | | |

| DN | MOP (PN) | C | Weight No. 8100L | | | | | | |
|-----|----------|-------|------------------|-------|-------|-------|-------|-------|------|
| | | | 1" | 1¼" | 1½" | 2" | 2½" | 3" | 4" |
| 50 | 10 | 32 | 2,70 | 2,60 | 2,60 | 2,50 | | | |
| 60 | | | 3,40 | 3,20 | 3,00 | 2,80 | 2,60 | | |
| 65 | | | 3,40 | 3,20 | 3,00 | 2,80 | 2,60 | | |
| 80 | | | 4,00 | 3,90 | 3,90 | 3,90 | 3,80 | 3,40 | |
| 100 | | | 5,90 | 5,70 | 5,70 | 5,50 | 5,20 | 4,80 | 4,50 |
| 125 | | 8,20 | 8,10 | 8,10 | 7,90 | 7,50 | 7,00 | 6,60 | |
| 150 | | 9,50 | 9,30 | 9,20 | 9,10 | 8,70 | 8,50 | 8,10 | |
| 200 | | 15,50 | 15,40 | 15,30 | 15,10 | 14,80 | 14,50 | 14,20 | |


Design features

- Made of ductile iron, epoxy powder coated
Flange sized according to EN 1092-2, and drilled in accordance with EN 1092-2, | PN 10 standard; PN 16 for DN 200 to DN 400 please specify on order - other standards on request
- Other nominal diameters on request

| DN | MOP (PN) | C | Weight |
|-----|----------|-------|--------|
| 40 | 10 | 19 | 2,00 |
| 50 | | | 2,90 |
| 60 | | | 2,80 |
| 65 | | | 3,80 |
| 80 | | | 4,00 |
| 100 | | 4,60 | |
| 125 | | 5,70 | |
| 150 | | 7,60 | |
| 200 | | 20 | 11,40 |
| 250 | | 22 | 17,20 |
| 300 | 25 | 25,50 | |
| 400 | | 38,00 | |

Blank flange

No. 8000



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainstraße 13
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com

C 6/1