

Preinstalled access doors for round ducts

IPR-SNSL



Description

IPR-SNSL access door are preinstalled in the round duct coupling. Due to such combination mounting of access doors in diameters from 80 to 800 mm becomes ultra-quick. There is no need to cut-out the hole, place the doors and tighten the screws - it is all done during production. It's an ideal solution for fire damper inspection purposes.



The male coupling has laser cut edges ideally matched to the access door.

Available versions:

IPR-SNSL - male connections


IPR-SNSLF - male and female connections

Example identification

Product code: **IPR-SNSL - aaa**

type _____
Ød _____

Dimensions

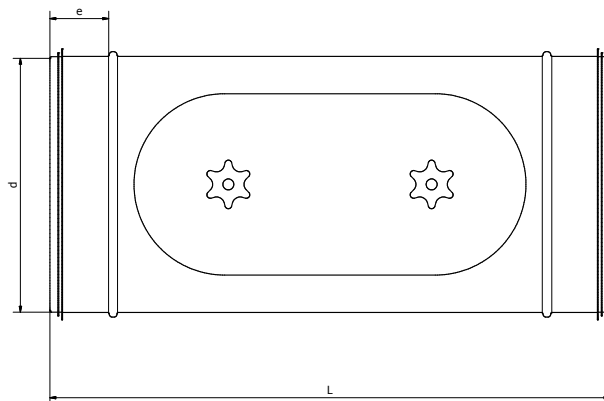

Ød [mm]	L [mm]	e [mm]
80	290	36
100	290	36
125	290	36
150	360	36
160	360	36
200	360	36
250	360	36
315	360	36
355	430	55
400	430	55
450	480	75
500	480	75
560	480	75
630	480	75
710	520	100
800	520	100



Access door can be install, for example, next to fire damper to enable the fire damper inspection without disassembly of the installation.