

# MiniPlus FF06

Rinsable fine filter

## APPLICATION

Rinsable MiniPlus FF06 fine filters ensure a continuous supply of filtered water. The fine filter prevents the ingress of foreign bodies, for example rust particles, strands of hemp and grains of sand and thus reduces the probability of corrosion. Sediment collected at the bottom of the filter bowl can simply be removed by rinsing the filter.

Compact in size, these filters were designed to fit where space is limited.

## APPROVALS

- DVGW

## SPECIAL FEATURES

- Simple assembly
- Filtered water supplied even during reverse rinsing
- Shock resistant clear synthetic material filter bowl enables easy checking of filter contamination
- Filter and complete filter bowl are replaceable
- Body with female and male threads
- All materials are ACS approved
- All materials are KTW approved
- Approved by TÜV LGA for low noise, Group 1 without limitations




## TECHNICAL DATA

Media	
Medium:	Drinking water
Connections/Sizes	
Connection sizes:	1/2" - 1 1/4"
Pressure values	
Max. operating pressure:	16.0 bar
Operating temperatures	
Max. operating temperature medium:	40 °C
Specifications	
Installation position:	Horizontal with filter bowl downwards

Note: The filter is constructed for drinking water installations. In case of a process water application the filter has to be proven individually.

CONSTRUCTION

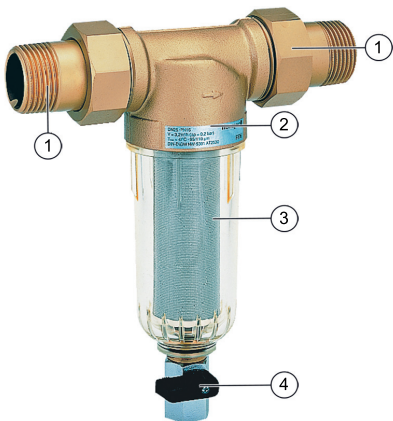Overview		Components	Materials
	1	Threaded connections (option AA)	Brass
	2	Housing with female and male threads, without threaded connection	Dezincification resistant pressed brass
	3	Fine filter in clear filter bowl	Stainless steel, shock-resistant, transparent synthetic material filter bowl
	4	Ball valve	Brass (Ball Valve body), Stainless steel (ball), Plastic (handle)
	Not depicted components		
		Double wring wrench	Plastic

METHOD OF OPERATION

The fine filter is composed of a body and a rinsable fine filter insert.

During normal operation, water flows through the filter mesh to the body outlet. To rinse the filter, the ball valve is opened which discharges the dirt particles. A continuous supply of filtered water is available also during the rinse cycle.

TRANSPORTATION AND STORAGE


Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity	85 % *

\*non condensing

Installation Example

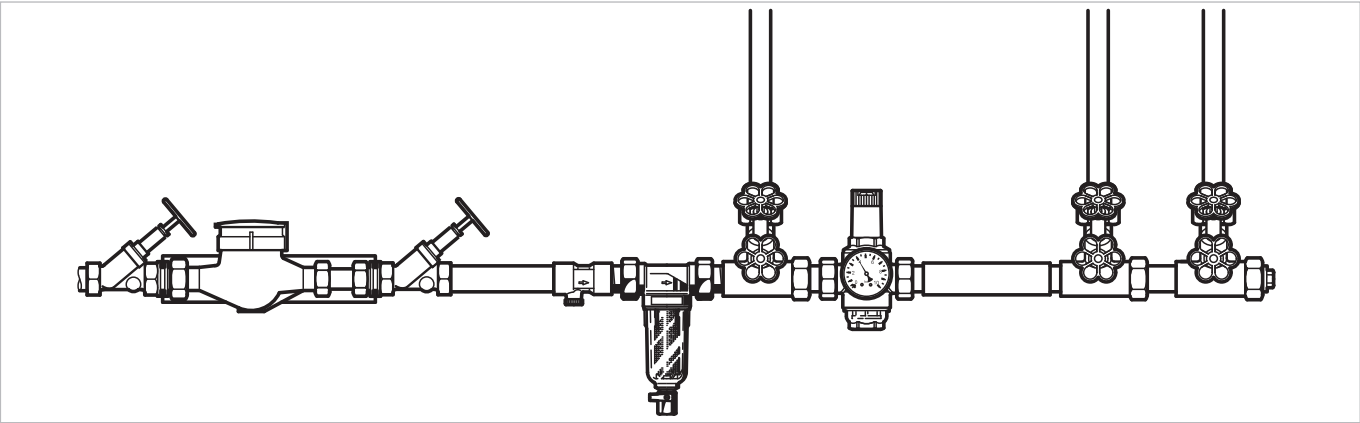


## TECHNICAL CHARACTERISTICS

### kvs-Values


Connection sizes:	15	20	25	32
$k_{VS}$ -value ( $m^3/h$ ):	4.0	5.8	10.4	10.4

### Pressure drop characteristics

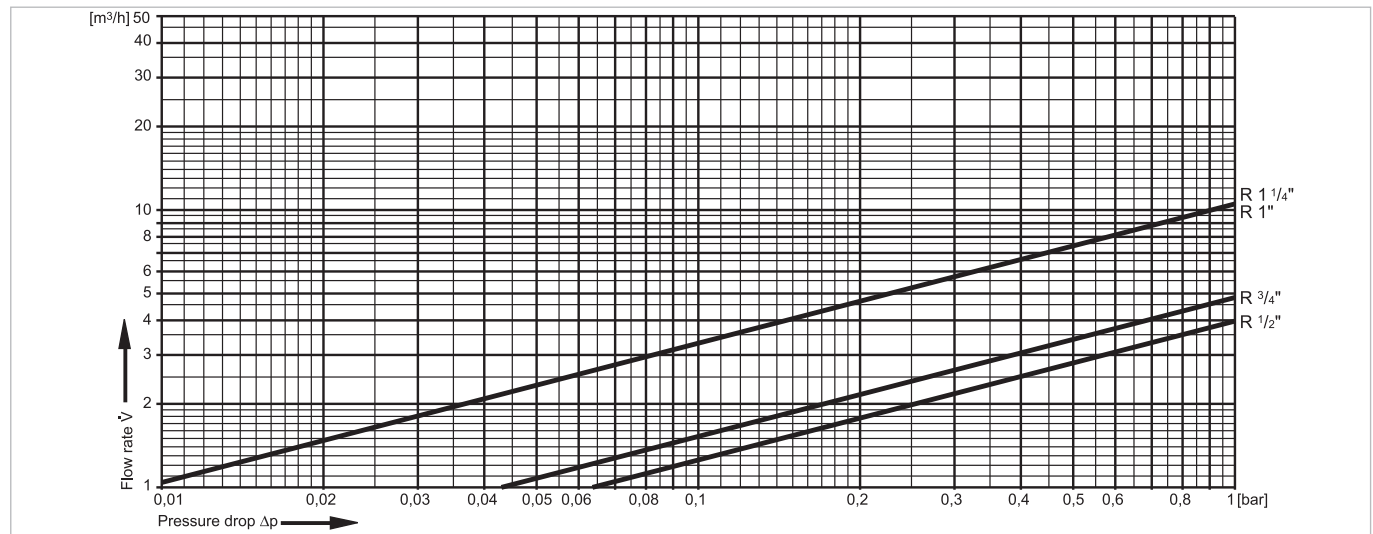

## DIMENSIONS

### Overview

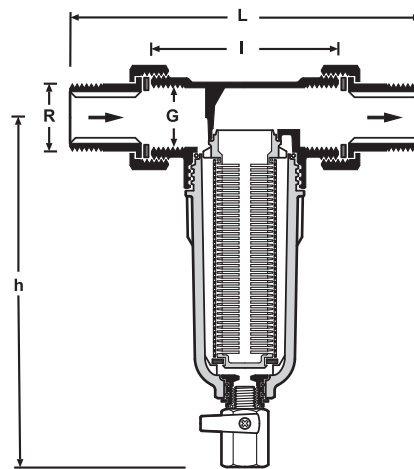

Parameter	Values				
Connection sizes:	R	$1\frac{1}{2}''$	$\frac{3}{4}''$	1"	$1\frac{1}{4}''$
Internal threads:	G	$1\frac{1}{2}''$	$\frac{3}{4}''$	1"	-
Weight:	kg	0.7	1.0	1.3	1.5
Dimensions:	L	140	158	179	197
	I	80	90	100	105
	h	158	180	180	180
Flow value at $\Delta p=0.5$ bar:	$m^3/h$	1.27	2.27	7.0	7.0
DVGW registration number:		NW-9301CM0399		-	-

Note: All dimensions in mm unless stated otherwise.

## ORDERING INFORMATION

The following tables contain all the information you need to make an order of an item of your choice. When ordering, please always state the type, the ordering or the part number.

### Options

The valve is available in the following sizes: 1/2", 3/4", 1" and 1 1/4".


- standard
- not available

		FF06-...AA	FF06-...EA
Connection type:	Threaded male connections, filter mesh size 100 µm	•	-
	Without connections, filter mesh size 100 µm	-	•

Note: ... = space holder for connection size

Note: Ordering number example for 1" and type AA valve: FF06-1AA


### Accessories

	Description	Dimension	Part No.
	<b>VST06B</b>	<b>Connection set</b>	
	Solder connections		
		1/2"	VST06-1/2B
		3/4"	VST06-3/4B
		1"	VST06-1B
	<b>ZR06K</b>	<b>Double ring wrench</b>	
	For removing filter bowl (no fig.)		
		1/2" - 1 1/4"	ZR06K

Spare Parts

MiniPlus FF06 Fine Filters from 1997 onwards

Overview

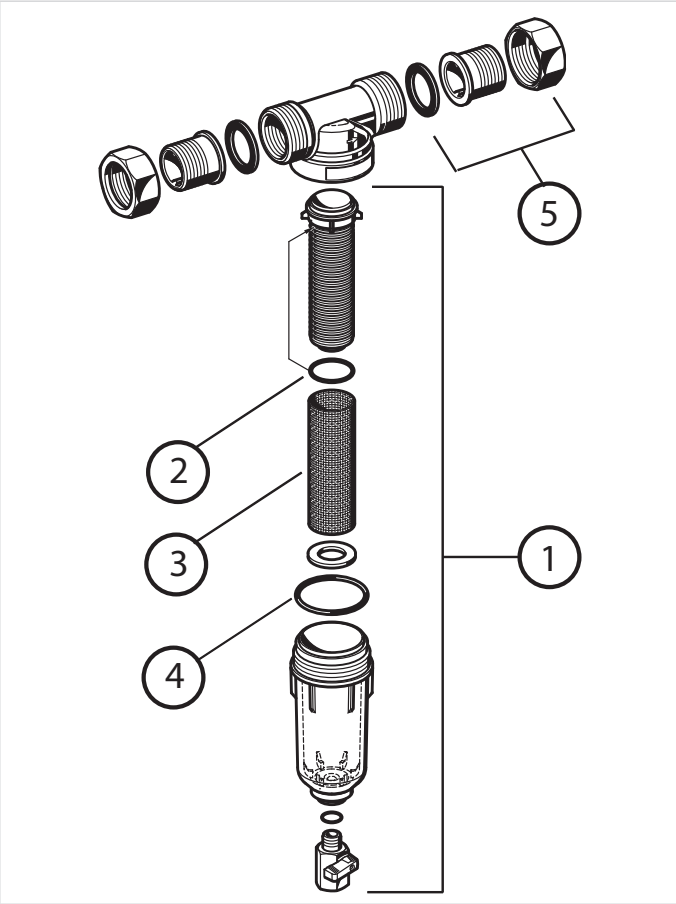

	Description	Dimension	Part No.
1	Clear filter bowl with sieve 100 µm and mesh carrier		
		1/2"	KF06-1/2A
		3/4" - 1 1/4"	KF06-1A
2	O-ring set for mesh carrier (10 pcs.)		
		1/2"	0903127
		3/4" - 1 1/4"	0903128
3	Replacement sieve (5 pcs.)		
	100 µm	1/2"	AS06-1/2A
	100 µm	3/4" - 1 1/4"	AS06-1A
	50 µm	1/2"	AS06-1/2C
	50 µm	3/4" - 1 1/4"	AS06-1C
4	O-ring set for filter bowl (10 pcs.)		
		1/2"	0901246
		3/4" - 1 1/4"	0901499
5	Connection set threaded connection		
		1/2"	VST06-1/2A
		3/4"	VST06-3/4A
		1"	VST06-1A
		1 1/4"	VST06-1 1/4A

Environmental & Energy Solutions

Honeywell GmbH  
Hardhofweg  
74821 MOSBACH  
GERMANY  
Phone: (49) 6261 810  
Fax: (49) 6261 81309  
<http://ecc.emea.honeywell.com>

Manufactured for and on behalf of the  
Environmental and Combustion Controls  
Division of Honeywell Technologies Sàrl, Z.A.  
La Pièce 16, 1180 Rolle, Switzerland  
by its Authorised Representative Honeywell GmbH  
EN0H-1115GE23 R1116  
Subject to change  
© 2016 Honeywell GmbH

