

Axor Citterio

Thermostatic mixer for concealed installation with shut-off valve and lever handle

Surfaces: **chrome** Article Number: **39700000**



Description

product features

- 1 outlet
- thermostat cartridge, ceramic valves 90°
- safety lock at 38° C
- temperature limitation adjustable
- flow rate: 26 l/min
- operating pressure: min. 0.1 MPa / max. 1.0 MPa
- scope of supply: metal escutcheon, handle, sleeve, mixing unit
- with silencer
- SVGW 0411-4902
- PA-IX 9711/ID
- ETA VA 1.43/18753
- ACS 13 ACC LY 756, valide jusqu'au 05.11.2018
- MCA 1300008
- TMV2 BC488/0809
- TMV3 BC487/0709
- TMV2 BC1364/0314
- TMV3 BC1365/0314
- WRAS 1311024
- Kiwa K11292_Thermostatic mixers
- SINTEF 3088

Mandatory Accessoires

- iBox universal Basic with pre-mounted angle connection G1/2 (#01810XXX)
- Basic set iBox universal (#01800XXX)

Optional Accessoires

- Extension element (#97407XXX)
- Extension escutcheon square two hole arrow (#14970XXX)
- iBox universal basic set extension 25 mm (#13595XXX)
- Fastening rail set for iBox universal (#96615XXX)

Certificates



Axor Citterio

Thermostatic mixer for concealed installation with shut-off valve and lever handle


Surfaces: **chrome** Article Number: **39700000**




Product image



Scale drawing

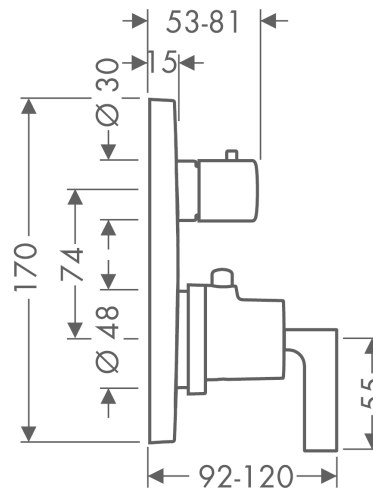

Flowchart

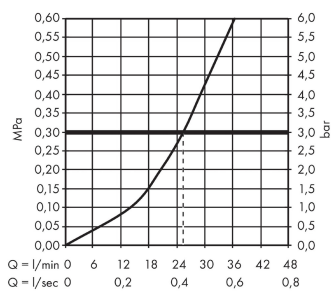

Axor Citterio


Thermostatic mixer for concealed installation with shut-off valve and lever handle

Surfaces: **chrome** Article Number: **39700000**



Exploded Drawing

Year of production: >05/11

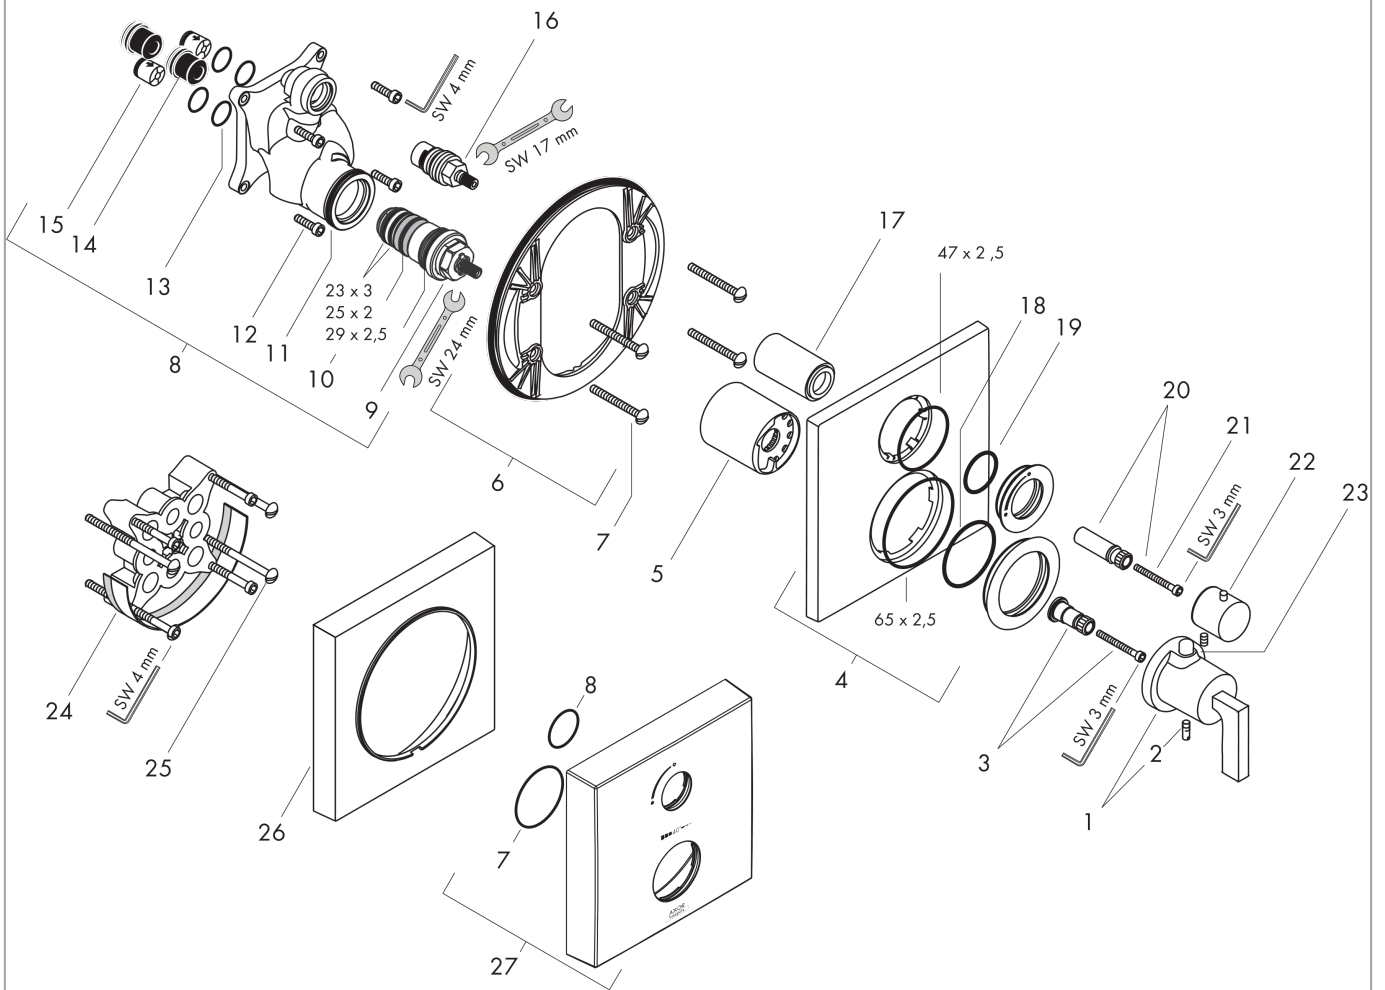

Axor Citterio

Thermostatic mixer for concealed installation with shut-off valve and lever handle

Surfaces: **chrome** Article Number: **39700000**



Spare part list

Year of production: >05/11

Pos.	Description	Article Number	PC	PU
1	handle for thermostat	39994000	-	1
2	hollow set screw M5x16	97666000	-	1
3	adapter for handle	96435000	-	1
4	escutcheon	96752000	-	1
5	sleeve	96439000	-	1
6	sub plate	96447000	-	1
7	set of fixing screws	96454000	-	1
8	installation unit cpl.	92760000	-	1
9	thermostat cartridge	94282000	-	1
10	sealing set	95037000	-	1
11	O-ring 39x2	98158000	-	1
12	set of screws	96525000	-	1
13	O-ring 16x2	98133000	-	1
14	noise reduction	94073000	-	1
15	set of non return valves DW 15	94074000	-	1
16	shut off unit right closing	94009000	-	1
17	sleeve	96446000	-	1
18	O-Ring 48x3	95508000	-	1
19	O-ring 29x3	98371000	-	1
20	adapter for handle	96451000	-	1
21	hexagon socket screw M4x35	92160000	-	1
22	handle	96520000	-	1
23	pushbutton red	97212000	-	1
24	extension 25 mm	13595000	-	1
25	set of fixing screws	97747000	-	1
26	extension 22 mm	97407000	-	1
27	escutcheon height = 33 mm (when wall is not deep enough).	14970000	-	1
a	concealed item	01800180	-	1
b	non return valve with filter	92499000	-	1
c	pushbutton	97792000	-	1