

Axor Citterio M

Thermostatic shower mixer for exposed installation

Surfaces: **chrome** Article Number: **34635000**



Description

product features

- 1 outlet
- thermostat cartridge, ceramic valve 180°
- safety lock at 40° C
- temperature limitation adjustable
- flow rate: 20 l/min
- operating pressure: min. 0.1 MPa / max. 1.0 MPa
- scope of supply: escutcheons
- non-return valve
- with silencer
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- SVGW 0905-5564
- DVGW NW-6509BT0642
- PA-IX 18988/IB
- ACS 14 ACC NY 073, valide jusqu'au 06.03.2019
- Kiwa UK 1508715
- Kiwa UK 1001702
- MCA 1100007
- TMV2 BC1110/1212
- WRAS 1511311
- WRAS 1001308
- Kiwa K11292_Thermostatic mixers

Certificates




kiwa



Product image



Scale drawing

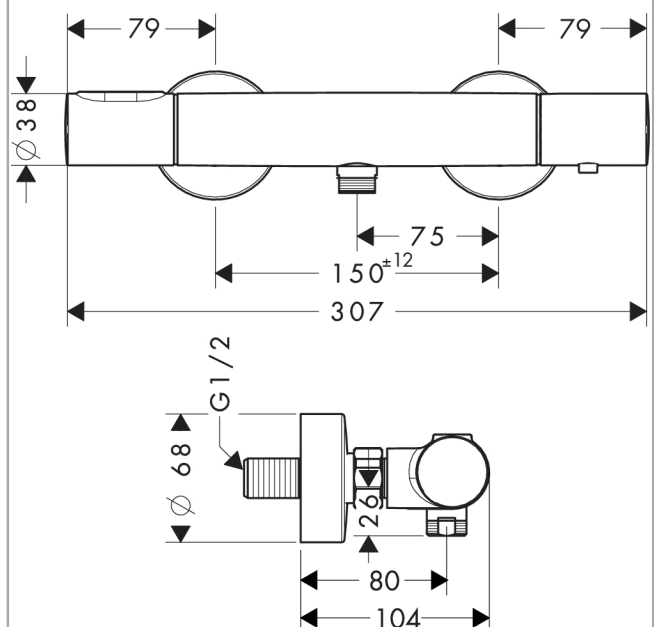


Axor Citterio M

Thermostatic shower mixer for exposed installation

Surfaces: **chrome** Article Number: **34635000**



Flowchart

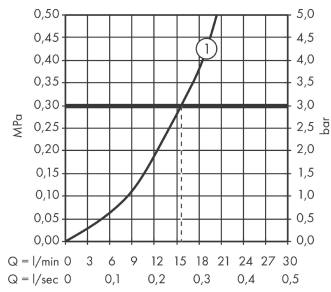

Axor Citterio M


Thermostatic shower mixer for exposed installation

Surfaces: **chrome** Article Number: **34635000**



Exploded Drawing

Year of production: >04/13

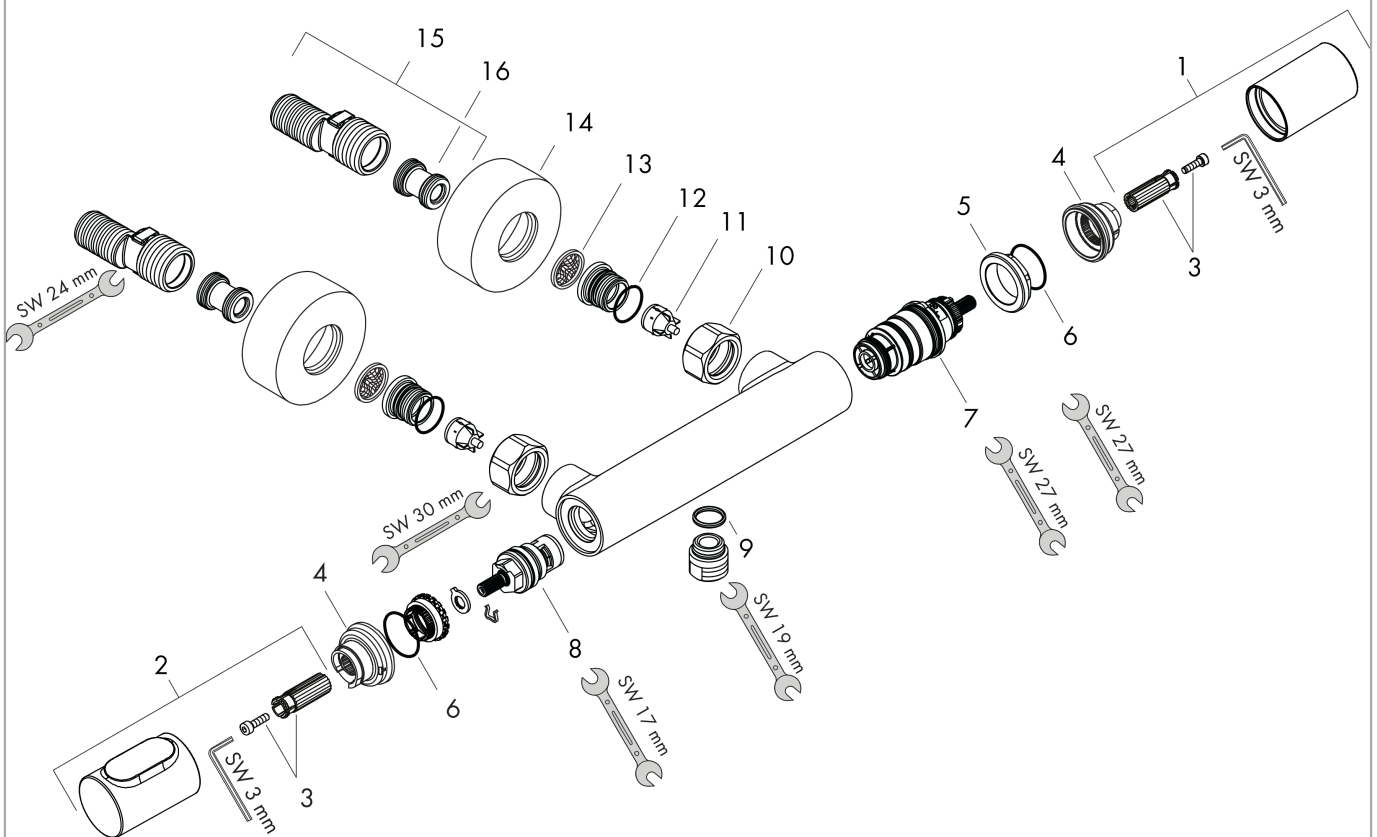

Axor Citterio M

Thermostatic shower mixer for exposed installation

Surfaces: **chrome** Article Number: **34635000**



Spare part list

Year of production: >04/13

| Pos. | Description | Article Number | PC | PU |
|------|--------------------------|----------------|----|----|
| 1 | handle for thermostat | 98287000 | - | 1 |
| 2 | handle | 98288000 | - | 1 |
| 3 | handle fixing set | 98290000 | - | 1 |
| 4 | safety set | 98289000 | - | 1 |
| 5 | nut | 98913000 | - | 1 |
| 6 | O-ring 26x1,5 | 98390000 | - | 1 |
| 7 | thermostat cartridge | 98282000 | - | 1 |
| 8 | shut off unit | 94149000 | - | 1 |
| 9 | O-ring 14x2 | 98129000 | - | 1 |
| 10 | set of nuts | 96157000 | - | 1 |
| 11 | non return valve | 96737000 | - | 1 |
| 12 | O-ring 17x1,5 | 98137000 | - | 1 |
| 13 | filter packing | 96922000 | - | 1 |
| 14 | escutcheon Ø 68 mm | 96467000 | - | 1 |
| 15 | set of S-unions (±12 mm) | 94140000 | - | 1 |
| 16 | noise reduction | 96429000 | - | 1 |
| a | set of S-unions (±32 mm) | 98592000 | - | 1 |
| b | conversion kit | 98329000 | - | 1 |
| c | pushbutton | 92848000 | - | 1 |